


TIRANTI ASOLA-ASOLA REDANCIA-REDANCIA

In fune d'acciaio anima tessile

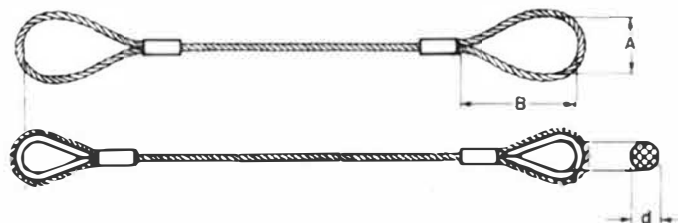

diam. mm	Carico massimo di utilizzo (da N/ kg) mm				d Max mm	Asole AxB mm
		U	60°	90°		
4	160	320	280	230	14	50x100
5	250	500	430	350	16	50x100
6	390	780	680	550	18	50x100
7	520	1040	900	740	20	56x112
8	700	1400	1210	990	24	64x128
9	870	1740	1510	1230	24	72x144
10	1070	2140	1850	1510	28	80x160
11	1300	2600	2250	1840	28	88x176
12	1540	3080	2670	2180	30	96x192
13	1810	3620	3130	2560	32	104x208
14	2090	4180	3620	2960	36	112x224
16	2750	5500	4760	3890	38	128x256
18	3500	7000	6060	4950	45	144x288
20	4290	8580	7430	6070	50	160x320
22	5190	10380	8990	7340	56	176x352
24	6170	12340	10680	8730	62	192x384
26	7250	14500	12550	10250	70	208x416
28	8410	16820	14560	11900	75	224x448
30	10000	20000	17320	14140	80	240x480
32	11000	22000	19050	15560	95	256x512
34	12370	24740	21420	17500	100	272x544
36	13890	27780	24050	19650	110	288x576
40	17160	34320	29710	24270	120	320x640

Fune anima metallica aumento portata: 8%
Coefficiente di sicurezza = 5:1
Conforme alla Direttiva Macchine 2006/42/CE